
TRD



DRAGLINK CONVEYOR WIDTH FROM 200 TO 1000 MM

ADVANTAGES:

- Suitable for machine tools with short swarfs production
- Automatic and continuous operation
- Low purchasing costs
- Energy saving
- Minimal maintenance
- Easy installation
- Reliable and solid construction
- Easy accessible chain stretcher
- Watertight body
- Anti-wear steel special version
- Motorized discharge hopper on request
- Available with delivery liquid lateral tank
- Electrical equipment on request

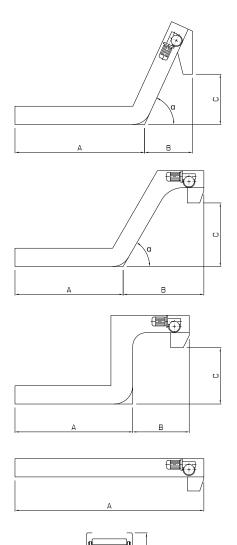



Series TRD draglingk conveyors extract swarfs from machine tools.

MACHINES ALWAYS CLEAN WITH FILTRA CONVEYORS!

TRD type	25	30	50	100
A - B - C	on request			
α	0 - 90°			
H min (mm)	110	175	250	380
L (mm)	200 - 400		200 - 1000	
Chain pitch (mm)	25,4	31,75	50	100

Structure in carbon steel or stainless steel - Colour on request - Subject to technical modifications