
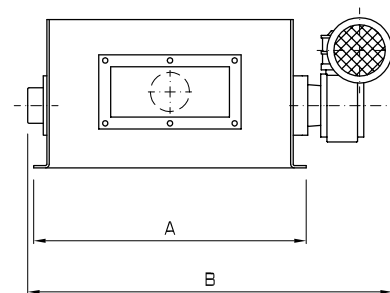


**Series DISK automatic magnetic filters clean coolants of magnetic metal machinings.**

#### ADVANTAGES:

- Suitable for all machine tools
- Non-consumable filtering media
- Self cleaning
- Automatic and continuous operation
- Low purchasing cost
- Energy saving
- Easy installation
- Reliable and solid construction
- Empowered magnetic efficiency
- Special ferrite magnets non demagnetizable
- Variable tilt sludge discharge
- Maximum contact surface
- Optimised periferal drum speed
- Pneumatic tyred- roller squeezer press for sludges available
- Pairable with Roll non-woven filter
- Electrical equipment on request

**FOR AN EXCELLENT RESULT  
COMBINE DISK WITH ROLL!**

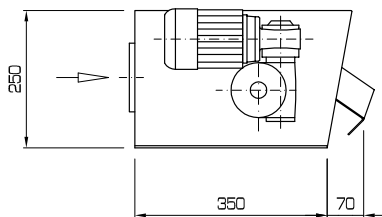

Disk type	50	100	150	200	250	300	350	400	450	500
l/min*	55	110	165	220	275	330	385	440	495	550
A (mm)	162	261	360	459	558	657	756	855	954	1053
B (mm)	317	416	515	614	713	812	911	1010	1109	1208

\* Viscosity < 4 cSt - Structure in carbon steel or stainless steel - Colour on request - Subject to technical modifications

Feel free to contact us! Our team can provide your custom solution.